

JT 5112 - MIOS (MIXED-SIGNAL IO SCAN) MODULE

IO System with digital, analog and frequency measurement



JT 5112

IO system for existing controllers

- 64 I/O channels in total
- 56 digital
 - 16 with frequency counter;
 - 1 with programmable clock generator;
 - 1 with pulse width measurement
- 8 digital or analog, programmable per channel
- Custom programmable FPGA

The JT 5112 MIOS module is a multi-function JTAG controlled I/O system instrument. It features 64 mixed signal I/O channels plus custom programmable functions. This compact unit was designed for easy integration into fixtures or bench use, making it ideal for production testing or as an everyday board debug tool.

The I/O channels allow measurement of both digital and analog signals. With the MIOS connectors and/or test points of a Unit Under Test (UUT) can be measured and driven as part of a JTAG/Boundary-scan test. By utilising the mixed signal I/O channels of a JT 5112 users enjoy increased test coverage for both the digital and the analog parts of a UUT.

From the total of 64 I/O channels, up to eight can be selected as analog channels that can measure or source voltages up to 30 Volts (unipolar) or ± 15 Volts (bipolar). The remaining 56 channels are digital only. Of these digital channels 16 also have a frequency counter, 1 can be used as a programmable clock generator and 1 more can be used for pulse width measurements. For higher channel counts multiple MIOS modules can be 'daisy-chained' via the TAP-IN, TAP-OUT connectors.

In addition to their use as boundary-scan I/O signals, the I/O channels can also be controlled via application specific digital functions that can be programmed in the reconfigurable FPGA (Altera Cyclone type) of the JT 5745. Examples of such functions include CAN bus(excl Phy), E-net(excl Phy), SPI, DDR memory interfaces etc.

The unit is fully supported by JTAG Technologies application development tools (ProVision and JTAG Live) and run-time software options such as PIP/LV (drivers for NI LabView), PIP/TS (drivers for TestStand), etc.

Voltage levels

TAPs:	Standard 3.3V (programmable) 1.05 to 3.6 V; 5 V tolerant
Digital I/O:	1.05 to 3.6 V; 5 V tolerant
Analog I/O:	0 to 30 V or -15 to $+15$ V

JT 5112 - MIOS (MIXED-SIGNAL IO SCAN) MODULE

IO System with digital, analog and frequency measurement

ELECTRICAL		Over Voltage Protection	
Power		Isolation threshold	VCC + 0.6 V
		Isolation voltage protection	- 0.5 V to +15 V
External	9-15 V, 0,8 A	Overshoot rejection	Overshoots less than 400 ns will not result in OVP isolation
TAP		Pull-up resistor	20 – 50 Kohm
TCK	40 MHz max (single box configuration)	Other	
	30 MHz max (dual box configuration)	Frequency counter	0 to 200 MHz
Voltage range	Standard 3.3V	Clock generator	0 to 62.5 MHz; step 0.0582 Hz
	Programmable 1.05 V to 3.6V (5V tolerant)	Pulse width measurement	4-8192 ns; accuracy 4 ns, resolution 1ns
Threshold	@ 50% of selected voltage	ENVIRONMENTAL MIL-T-28800E Class5 Style E	
Digital I/O		Temperature	
Voltage range	1.05 V to 3.6 V	Rated range of use	0 °C to 60 °C (boxed); 0 °C to 70 °C (unboxed)
Output current	max ±8 mA @ 3.3 V	Storage and transport	-5 °C to 60 °C (boxed); -40 °C to 70 °C (unboxed)
Analog I/O		Relative Humidity	
Voltage range	0 V to 30 V or -15 V to +15 V @ 5 mA max	Operating	15% to 90% non-condensing
Resolution	16 bit (0,5 mV)	Storage and transport	5% to 95% non-condensing
Relative fault	± 0,7% full scale	Vibration	
Input impedance	1 Mohm parallel with 100 pF	Swept sine resonance search	5 – 55 Hz, 2 g (0.33 mm p-p), 15 min per axis 10 min resonance dwell
Output impedance	100 Ohm.	Dimensions	
Sample rate	15kS/s	Weight	320 grams
Slew rate	0.5V/µs	Size (L x W x H)	85 x 155 x 40 mm

Increasing test coverage

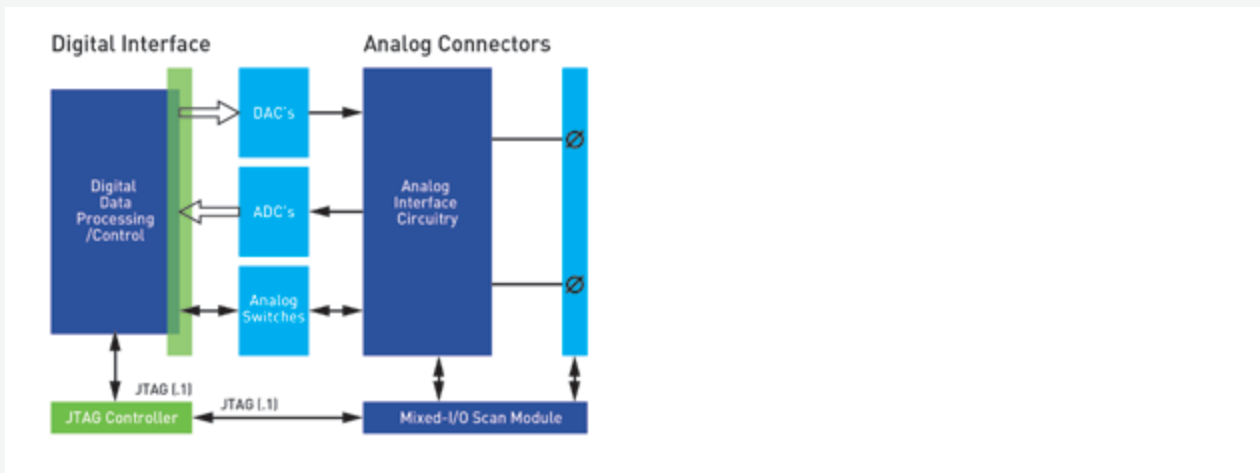


Figure 2 Increasing the test coverage using the mixed signal I/O channels.

- Regional sales offices and agents www.jtag.com

Region or Country	Telephone	E-mail
• North America	Toll free - 877 FOR JTAG Western US - 949 454 9040	info@jtag.com
• Europe and Rest of World	+31 (0)40 295 0870	info@jtag.nl
• Finland	+358 (0)9 4730 2670	finland@jtag.com
• Germany	+49 (0)971 6991064	germany@jtag.com
• Sweden	+46 (0)8 754 6200	sweden@jtag.com
• United Kingdom & Ireland	+44 (0)1234 831212	sales@jtag.co.uk
• China, Malaysia, Singapore, Thailand, Taiwan	+86 (021) 5831 1577	info@jtag.com.cn

01_2015_1000
© 2015 The JTAG Technologies logo and other trademarks designed with the symbol "®" are trademarks of JTAG Technologies registered in Europe and/or other countries. JTAG Technologies reserves the right to change design and specifications without notice.

